


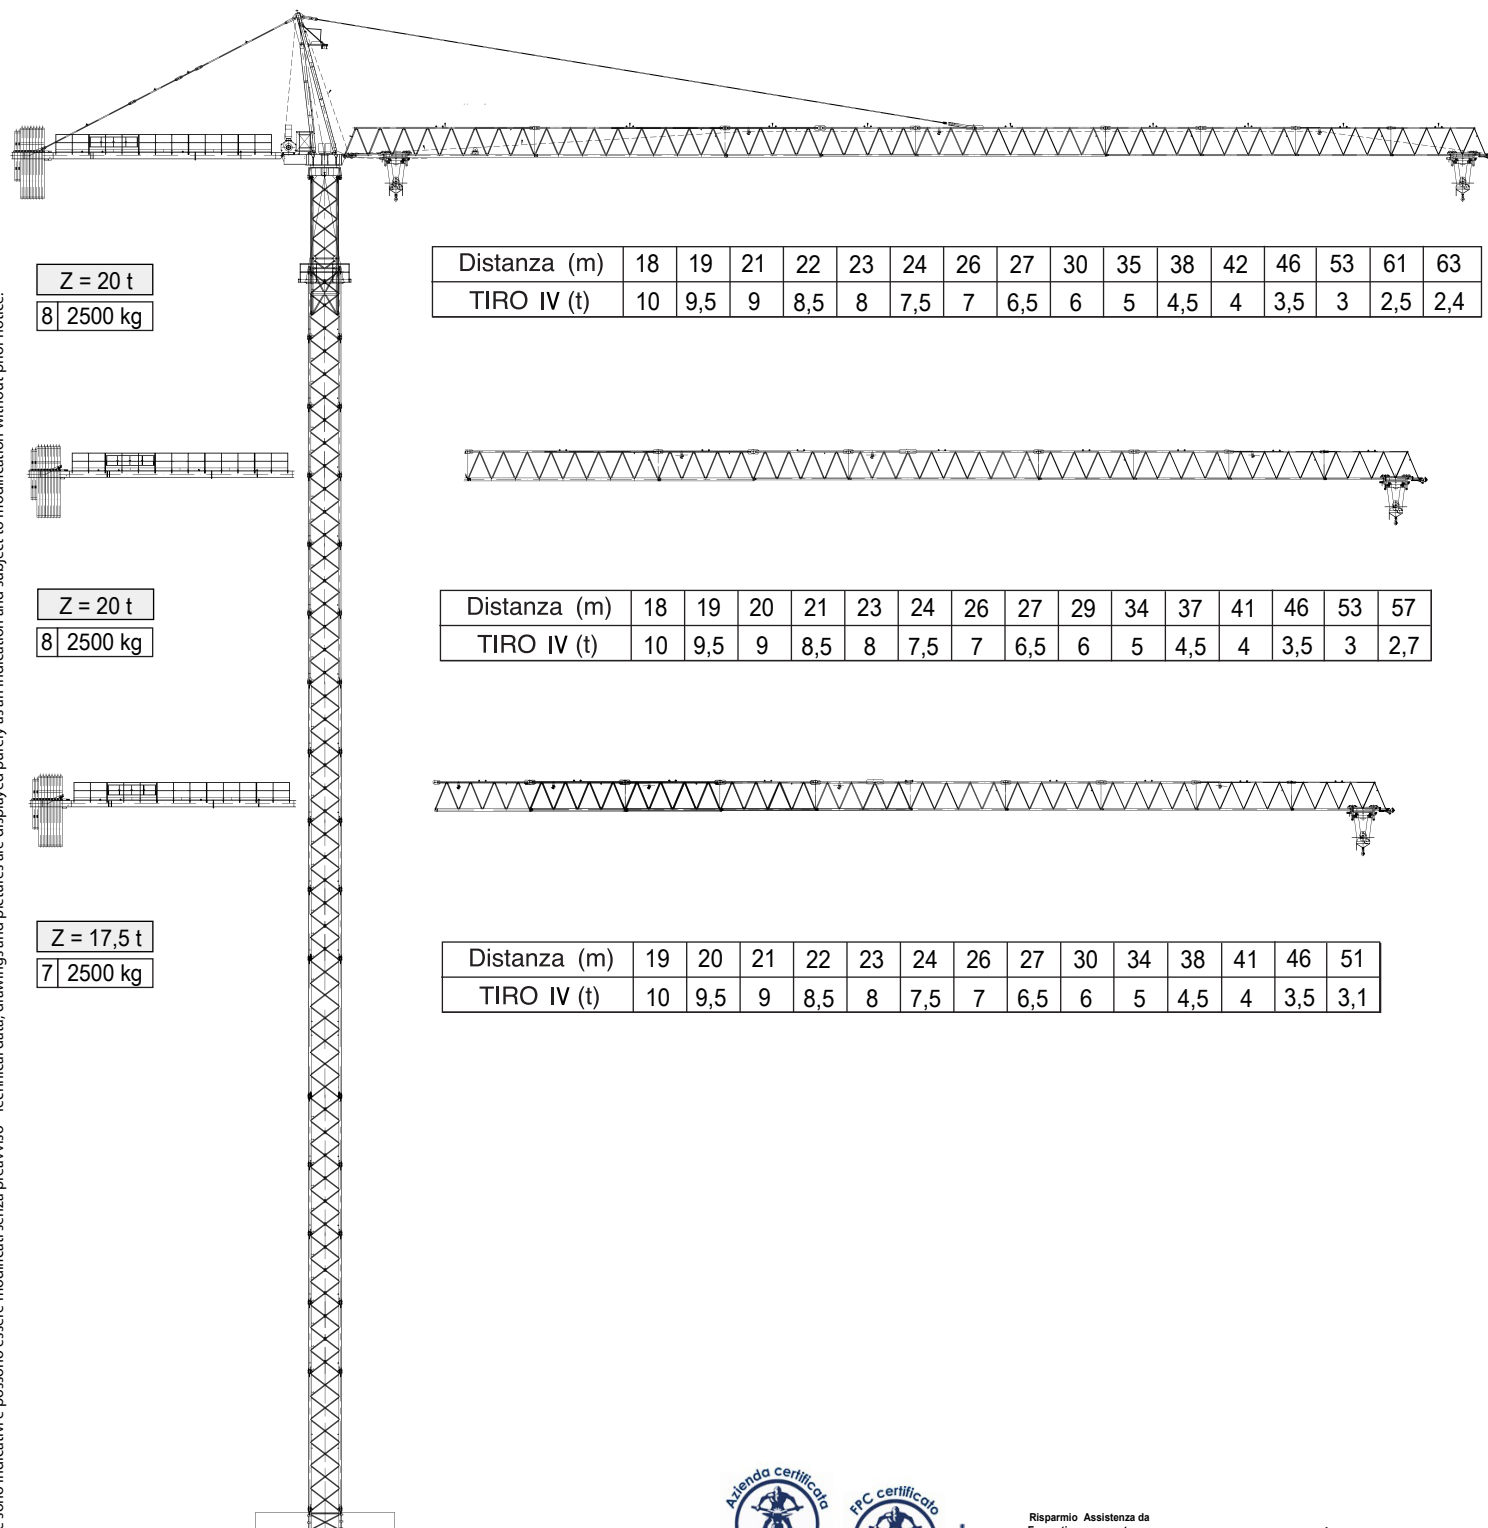

Z = 20 t  
8 | 2500 kg

| Distanza (m) | 18 | 19  | 21 | 22  | 23 | 24  | 26 | 27  | 30 | 35 | 38  | 42 | 46  | 53 | 61  | 63  |
|--------------|----|-----|----|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|-----|
| TIRO IV (t)  | 10 | 9,5 | 9  | 8,5 | 8  | 7,5 | 7  | 6,5 | 6  | 5  | 4,5 | 4  | 3,5 | 3  | 2,5 | 2,4 |

Z = 20 t  
8 | 2500 kg

| Distanza (m) | 18 | 19  | 20 | 21  | 23 | 24  | 26 | 27  | 29 | 34 | 37  | 41 | 46  | 53 | 57  |
|--------------|----|-----|----|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|
| TIRO IV (t)  | 10 | 9,5 | 9  | 8,5 | 8  | 7,5 | 7  | 6,5 | 6  | 5  | 4,5 | 4  | 3,5 | 3  | 2,7 |

Z = 17,5 t  
7 | 2500 kg

| Distanza (m) | 19 | 20  | 21 | 22  | 23 | 24  | 26 | 27  | 30 | 34 | 38  | 41 | 46  | 51  |
|--------------|----|-----|----|-----|----|-----|----|-----|----|----|-----|----|-----|-----|
| TIRO IV (t)  | 10 | 9,5 | 9  | 8,5 | 8  | 7,5 | 7  | 6,5 | 6  | 5  | 4,5 | 4  | 3,5 | 3,1 |



DIN 15018-H1B3 EN 14439:2009

